



الرافعات الشخصية المتحركة ACCESS PLATFORMS



مستر مشين
Mister Machine
خدمات تأجير متميزة Quality Equipment Hire



أوال
awal

شركة أوال لتأجير المعدات
Awal Equipment Hiring Company

www.mister-machine.com





Access Platforms

055 733 3875, 055 853 3354



Maintenance Hotline
050 083 3327

www.mister-machine.com

CONTACT DETAILS

4

LOCATION MAP

5

ACCESS PLATFORMS

- ARTICULATED BOOM LIFTS (MAN LIFTS)
- TELESCOPIC BOOM LIFTS (MAN LIFTS)
- SCISSOR LIFTS - ELECTRIC
- SCISSOR LIFTS - DIESEL

6

10

16

20

CONTACT DETAILS (BAHRAIN)

26



3

Access Platforms

Please call: +966 55 733 3875, +966 55 878 1119

Email: awal@mister-machine.com - website: www.mister-machine.com



KINGDOM OF SAUDI ARABIA

EQUIPMENT DIVISIONS

المملكة العربية السعودية

أقسام المعدات

ACCESS PLATFORMS

053 533 3045, 055 733 3875

قُلُقُنْتَمَرَلَا ؤِيصْخْشَلَا تَاعْفَارَلَا

٠٥٣ ٥٣٣ ٣٠٤٥ – ٠٥٥ ٧٣٣ ٣٨٧٥

FORKLIFTS

053 533 3045, 055 733 3875

ؤِيكْوَشْشَلَا تَاعْفَارَلَا

٠٥٣ ٥٣٣ ٣٠٤٥ – ٠٥٥ ٧٣٣ ٣٨٧٥

GENERATORS AND COMPRESSORS

055 733 3875, 050 079 3332

طْغَاوْضَلَاوِ ؤِيئَابَرْهَكَلَا تَادَلْوَمَرَلَا

٠٥٥ ٧٣٣ ٣٨٧٥ – ٠٥٠ ٠٧٩ ٣٣٣٢

HEAVY EQUIPMENT


053 533 3045, 055 733 3875

ؤَلِيْقْثَلَا تَادَعْمَرَلَا

٠٥٣ ٥٣٣ ٣٠٤٥ – ٠٥٥ ٧٣٣ ٣٨٧٥

WELDING EQUIPMENT

055 733 3875, 050 079 3332

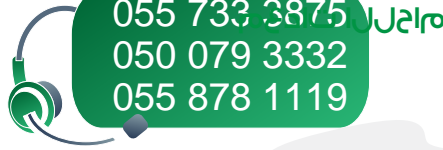

٠٥٥ ٧٣٣ ٣٨٧٥ – ٠٥٠ ٠٧٩ ٣٣٣٢

OILFIELD EQUIPMENT

055 733 3875, 050 079 3332

طْفَنَلَا لَوْقْخْ تَادَعْمَرَلَا

٠٥٥ ٧٣٣ ٣٨٧٥ – ٠٥٠ ٠٧٩ ٣٣٣٢

TRANSPORTATION & LOGISTICS

050 079 3332, 053 533 3045

ؤِيْتَسْجَوْلَلَا تَامَدْخَلَاوِ تَايَلْقَنْلَا

٠٥٠ ٠٧٩ ٣٣٣٢ – ٠٥٣ ٥٣٣ ٣٠٤٥

QUALITY USED EQUIPMENT FOR SALE

055 888 4575, +973 3975 7554

ؤَزَاتَمَمَرَلَا ؤَلْمَعْمَتَسَمَرَلَا تَادَعْمَرَلَا عِيْب

٠٥٥ ٨٨٨ ٤٥٧٥ – +٩٧٣ ٣٩٧٥ ٧٥٥٤

24 Hours Hotline: 055 878 1119

Email: awal@mister-machine.com

Website: www.mister-machine.com

الخط الساخن ٢٤ ساعة: ٠٥٥ ٨٧٨ ١١١٩

awal@mister-machine.com

www.mister-machine.com

Al Khobar Branch

Tel : 013 808 4412, 013 808 4413

013 808 4415, 013 808 4419

P.O. Box: 8146, Al Khobar 34623

فرع الخبر

هاتف: ٠١٣ ٨٠٨ ٤٤١٢ – ٠١٣ ٨٠٨ ٤٤١٣

٠١٣ ٨٠٨ ٤٤١٥ – ٠١٣ ٨٠٨ ٤٤١٩

ص.ب: ٨١٤٦، الخبر ٣٤٦٢٣

Address

Dhahran 34521, 4043 Hawtharah Al Asri Street, Al

Dhahran Industrial District (Al Sana'iya)

Kingdom Of Saudi Arabia

Short Address: ELDA4043

GPS Map: [26.250789, 50.011315](https://www.google.com/maps/place/26.250789,50.011315)

العنوان

الظهران ٣٤٥٢١، شارع حوثره العصري

٤٠٤٣، حي الظهران الصناعي (الصناعية)

المملكة العربية السعودية

العنوان المختصر : ELDA4043

خريطة تحديد الموقع: [26.250789, 50.011315](https://www.google.com/maps/place/26.250789,50.011315)


Please call: +966 55 733 3875, +966 55 878 1119

Email: awal@mister-machine.com - website: www.mister-machine.com



4

Access Platforms

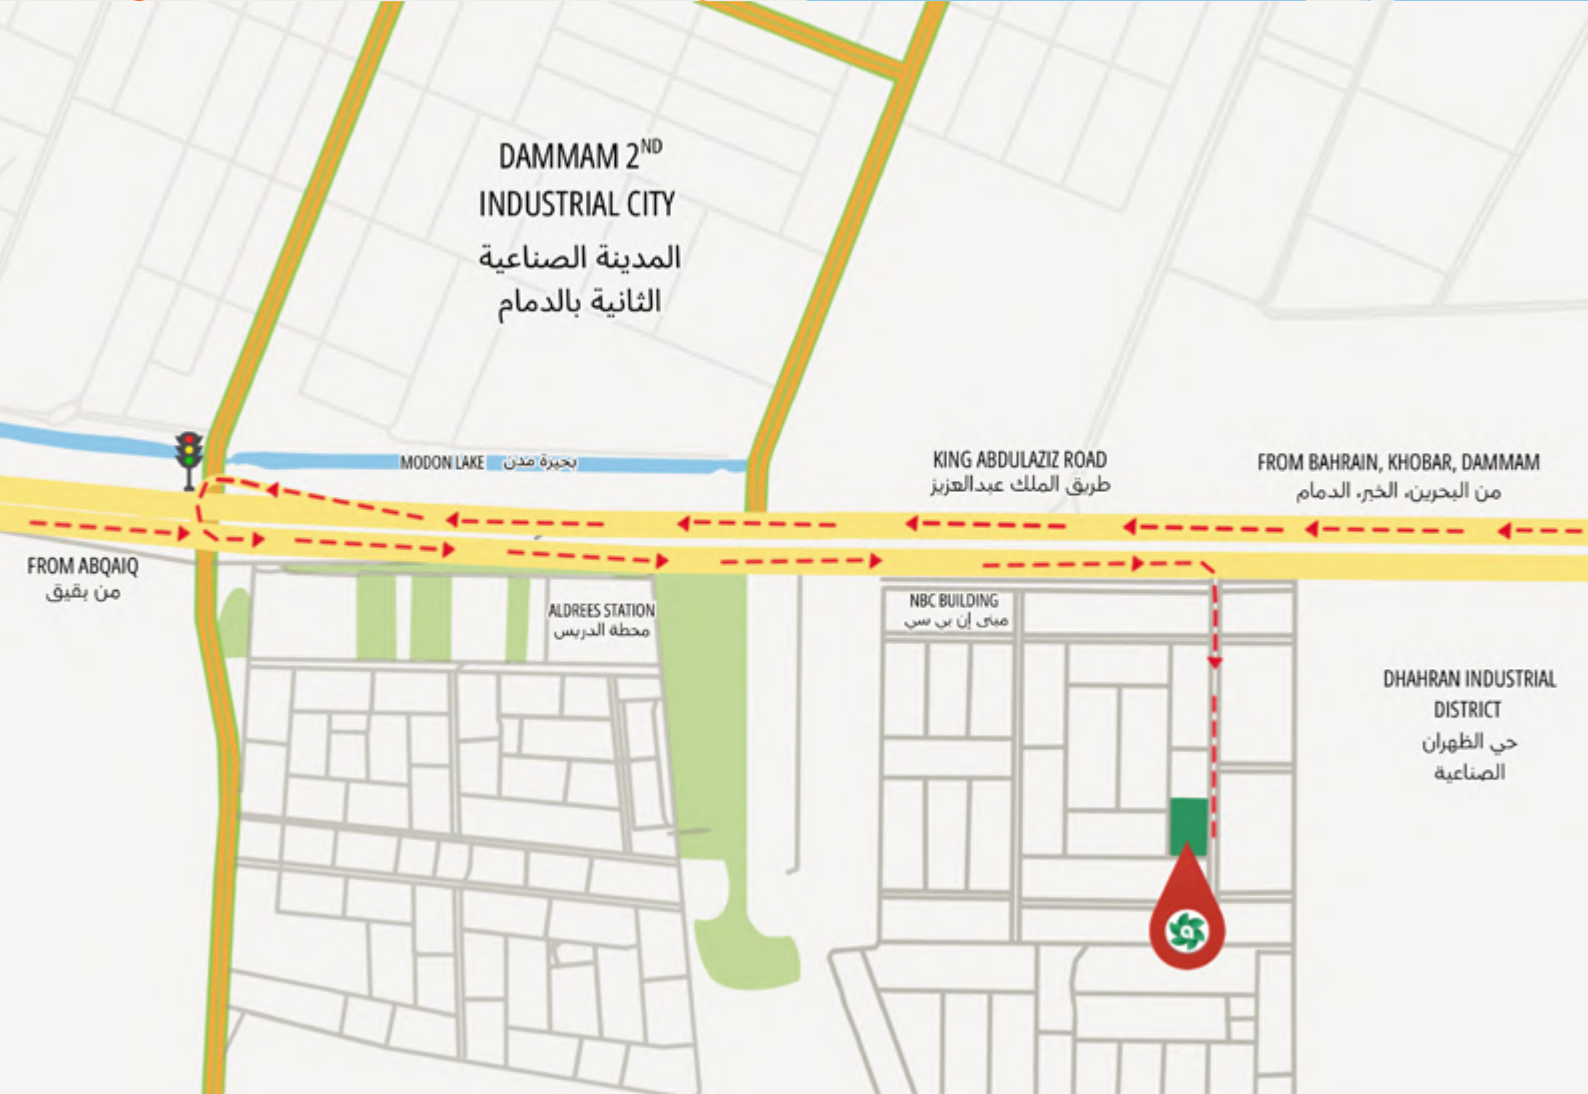

Articulated Boom Lifts (Man Lifts)


Articulating Boom Lifts (Man Lifts)

الرافعات الشخصية المتنقلة: رافعات السلة المفصليّة

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Articulated boom lifts (Man Lifts):** Give you the extra reach you need to work over and around obstacles on the job site. They offer exceptional outreach, versatile performance and Larger work envelopes provide you with access to those hard-to-reach places.

Access Platform Type	Articulating Boom Lift 227kg,Work Height 16.1m with Jib	Articulating Boom Lift 227Kg,Work Height 20.4M With Jib
Maker / Model	Genie Z45/25J RT (4x4)	Genie Z60/34 (4x4) IC
Working Height	16.07 m (52 ft 2 in)	20.39 m (66 ft 4 in)
Platform Height	14.07 m (46 ft 2 in)	18.39 m (60 ft 4 in)
Horizontal reach maximum	7.65 m (25 ft 1 in)	11.05 m (36 ft 3 in)
Up-and-over clearance maximum	7.16 m (23 ft 6 in)	8.23 m (27 ft)
Platform Length	0.76 m (2 ft 6 in)	0.91 m (3 ft)
Platform Width	1.83 m (6 ft)	2.44 m (8 ft)
Height - Stowed	2.11 m (6 ft 11 in)	2.69 m (8 ft 10 in)
Length - Stowed	6.83 m (22 ft 5 in)	8.15 m (26 ft 9 in)
Overall Width	2.29 m (7 ft 6 in)	2.46 m (8 ft 1 in)
Productivity		
Platform capacity	227 kg	227 kg
Platform occupancy	2 Person	2 Person
Platform rotation	160 degrees	180 degrees
Vertical jib rotation	135 degrees	90 degrees
Drive Speed - Stowed	8.0 km/h	4.8 km/h
Drive Speed - Raised	1.1 km/h	1.1 km/h
Gradeability - Stowed	45 %	40 %
Turning Radius - Inside	1.70 m	3.04 m
Turning Radius - Outside	4.5 m	6.07 m
Power & Weight		
Engine Type	Diesel engine	Diesel engine
Fuel Tank Capacity	64.4 L	75 lit
Gross Weight	6,924 kg	11,231 kg
Certification		
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV

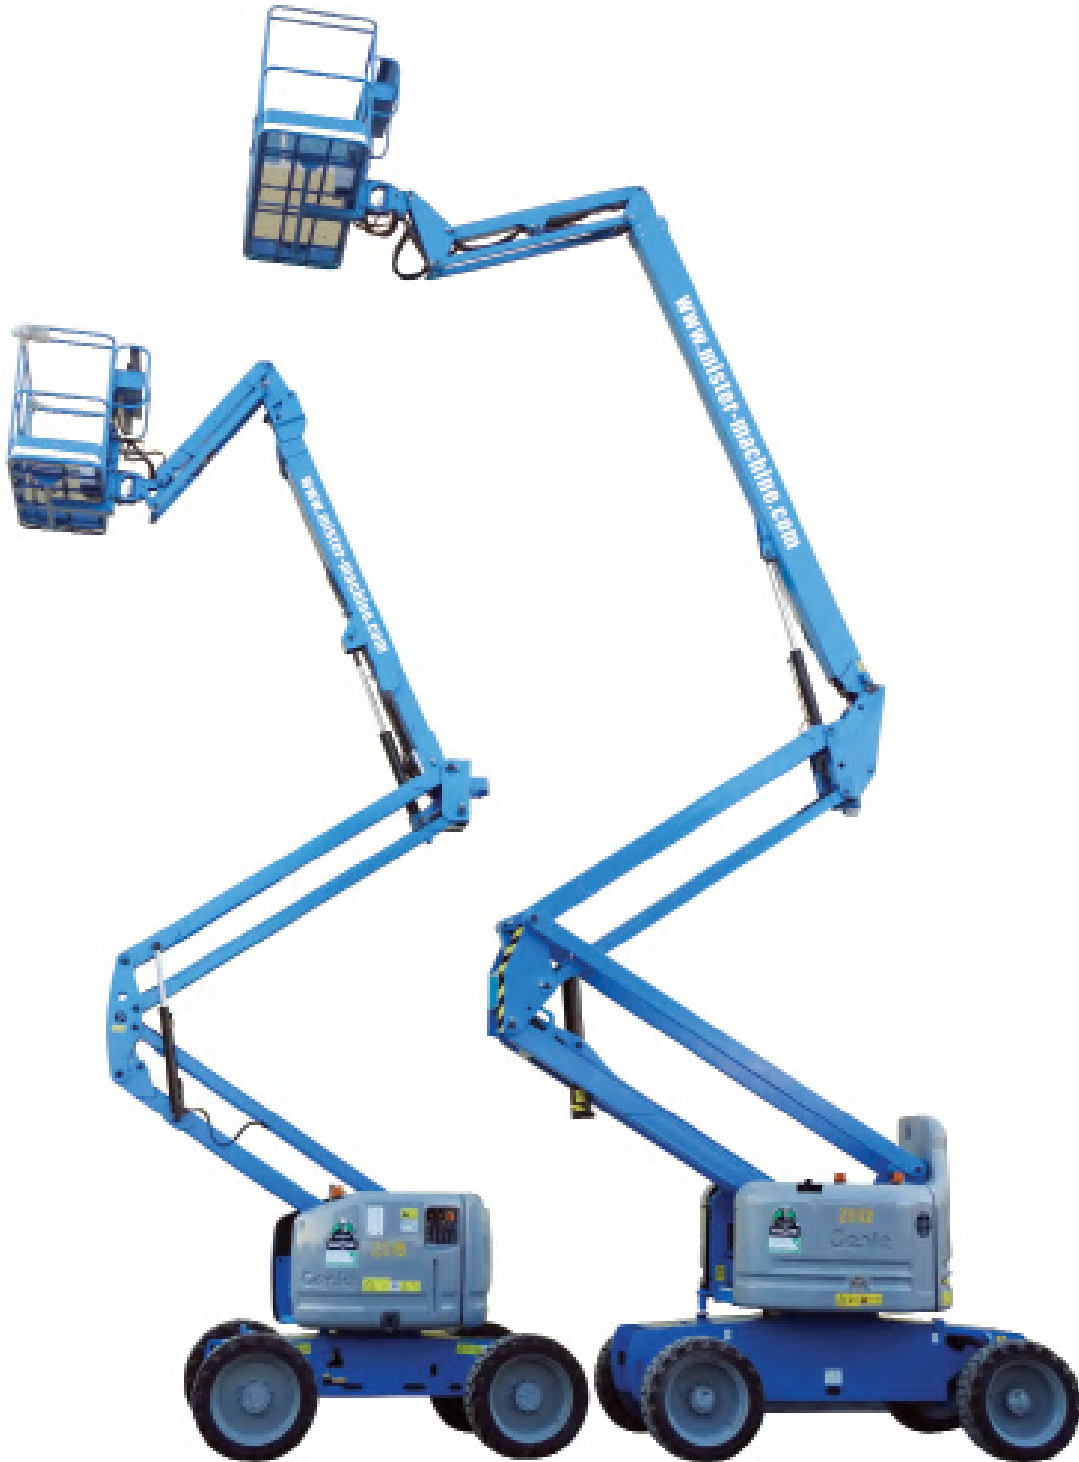

SAFETY NOTES:

- All our access platforms have foam filled tyres for safety.
- Our access platforms are built to meet the highest standards of safety, reliability and are in excellent working conditions with Certified Performance.



Articulated Boom Lifts (Man Lifts)

ARTICULATED BOOM LIFTS (MAN LIFTS)

الرافعات الشخصية المتنقلة: رافعات السلة المفصالية

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Articulated boom lifts (Man Lifts):** Give you the extra reach you need to work over and around obstacles on the job site. They offer exceptional outreach, versatile performance and Larger work envelopes provide you with access to those hard-to-reach places.

Access Platform Name	Articulating Boom Lift 227kg, Work Height 25.6m with Jib
Maker / Model	Genie Z80/60 (4x4)
Working Height	25.77 m (84 ft)
Platform Height	23.77 m (78 ft)
Horizontal reach maximum	18.29 m (60 ft)
Up-and-over clearance maximum	8.83 m (29 ft)
Platform Length	0.91 m (3 ft)
Platform Width	2.44 m (8 ft)
Height - Stowed	3.0 m (9 ft 10 in)
Length - Stowed	11.27 m (37 ft)
Overall Width	2.49 m (8 ft 2 in)
Productivity	
Platform capacity	227 kg
Platform occupancy	2 Person
Platform rotation	160 degrees
Vertical jib rotation	135 degrees
Drive Speed - Stowed	4.83 km/h
Drive Speed - Raised	1.1 km/h
Gradeability - Stowed	45 %
Turning Radius - Inside	4.42 m
Turning Radius - Outside	7.47 m
Power & Weight	
Engine Type	Diesel engine
Fuel Tank Capacity	132 L
Gross Weight	16,284 kg
Certification	
Certification Co.	Bureau Veritas / TUV



الرافعات الشخصية المتحركة: رافعات السلة المفصليّة
Articulated Boom Lifts (Man Lifts)



SAFETY NOTES:

- All our access platforms have foam filled tyres for safety.
- Our access platforms are built to meet the highest standards of safety, reliability and are in excellent working conditions with Certified Performance.



Telescopic Boom Lifts (Man Lifts)

Telescopic Boom Lifts (Man Lifts)

الرافعات الشخصية المتنقلة: رافعات أشخاص تلسكوبية

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Telescopic boom lifts:** Give you the ability to safely work at very high attitude quickly and efficiently which saves time and money. Our Man Lifts take you right where you need to work while providing you with the capacity and height you need. Telescopic boom lifts are ideal for work that requires maximum vertical and horizontal outreach.

Access Platform Name	Telescopic Boom Lift: 227kg, Work Height 20.3m	Telescopic Boom Lift 227kg, Work Height 21.8m with Jib
Maker / Model	Genie S-60 (4x2)	Genie S-65 (4x4)
Working Height	20.3 m (66 ft)	21.8 m (71 ft)
Platform Height	18.3 m (60 ft)	19.8 m (65 ft)
Horizontal reach maximum	15.48 m (50 ft 10 in)	17.10 m
Platform Length	0.91 m (3 ft)	0.91 m (3 ft)
Platform Width	2.44 m (8 ft)	2.44 m (8 ft)
Height - Stowed	2.72 m (8 ft 11 in)	2.72 m (8 ft 11 in)
Length - Stowed	8.51 m (27 ft 11 in)	9.5 m (31 ft 2 in)
Overall Width	2.49 m (8 ft 2 in)	2.49 m (8 ft 2 in)
Productivity		
Platform capacity	227 kg	227 kg
Platform occupancy	2 Person	160 degrees
Platform rotation	160 degrees	135 degrees
Vertical jib rotation	135 degrees	6.4 km/h
Drive Speed - Stowed	6.4 km/h	18 m/min
Drive Speed - Raised	18 m/min	45 %
Gradeability - Stowed	30 %	2.36 m
Turning Radius - Inside	2.36 m	5.72 m
Turning Radius - Outside		
Engine Type	Diesel engine	Diesel engine
Fuel Tank Capacity	132 L	132 L
Gross Weight	9,651 kg	10,445 kg
Certification		
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV



الرافعات الشخصية المتنقلة: رافعات أشخاص تلسكوبية
Telescopic Boom Lifts (Man Lifts)



SAFETY NOTES:

- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



Telescopic Boom Lifts (Man Lifts)

الرافعات الشخصية المتنقلة: رافعات أشخاص تلسكوبية

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Telescopic boom lifts:** Give you the ability to safely work at very high attitude quickly and efficiently which saves time and money. Our Man Lifts take you right where you need to work while providing you with the capacity and height you need. Telescopic boom lifts are ideal for work that requires maximum vertical and horizontal outreach.

Access Platform Name	Telescopic Boom Lift: 227kg, Work Height 27.9m with Jib
Maker / Model	Genie S-85 (4x4)
Working Height	27.9 m (91 ft)
Platform Height	25.9 m (85 ft)
Horizontal reach maximum	23.32 m (76 ft 6 in)
Platform Length	0.91 m (3 ft)
Platform Width	2.44 m (8 ft)
Height - Stowed	2.8 m (9 ft 2 in)
Length - Stowed	12.19 m (40 ft)
Overall Width	2.49 m (8 ft 2 in)
Productivity	
Platform capacity	227 kg
Platform occupancy	2 Person
Platform rotation	160 degrees
Vertical jib rotation	135 degrees
Drive Speed - Stowed	5.4 km/h
Drive Speed - Raised	18 m/min
Gradeability - Stowed	45 %
Turning Radius - Inside	3.66 m
Turning Radius - Outside	6.55 m
Power & Weight	
Engine Type	Diesel engine
Fuel Tank Capacity	132 L
Gross Weight	17,237 kg
Certification	
Certification Co.	Bureau Veritas / TUV

الرافعات الشخصية المتنقلة: رافعات أشخاص تلسكوبية
Telescopic Boom Lifts (Man Lifts)



SAFETY NOTES:

- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



Telescopic Boom Lifts (Man Lifts)

Telescopic Boom Lifts (Man Lifts)

الرافعات الشخصية المتنقلة: رافعات أشخاص تلسكوبية

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Telescopic boom lifts:** Give you the ability to safely work at very high attitude quickly and efficiently which saves time and money. Our Man Lifts take you right where you need to work while providing you with the capacity and height you need. Telescopic boom lifts are ideal for work that requires maximum vertical and horizontal outreach.

Access Platform Name	Telescopic Boom Lift 340kg, Work Height 32.5m	Telescopic Boom Lift 227kg, Work Height 40.2m with Jib
Maker / Model	Genie S-100 (4x4)	Genie S-125 (4x4)
Working Height	32.48 m (106 ft)	40.15 m (131 ft 2 in)
Platform Height	30.48 m (100 ft)	38.15 m (125 ft 2 in)
Horizontal reach maximum	22.86 m (75 ft)	24.38 m (80 ft)
Platform Length	0.91 m (3 ft)	0.91 m (3 ft)
Platform Width	2.44 m (8 ft)	2.44 m (8 ft)
Height - Stowed	3.07 m (10 ft 1 in)	3.07 m (10 ft 1 in)
Length - Stowed	13.00 m (42 ft 8 in)	14.25 m (46 ft 9 in)
Overall Width: axels retracted	2.49 m (8 ft 2 in)	2.49 m (8 ft 2 in)
Overall Width: axels extended	3.35 m (11 ft)	3.35 m (11 ft)
Productivity		
Platform capacity	340 kg	227 kg
Platform occupancy	2 Person	2 Person
Platform rotation	160 degrees	160 degrees
Vertical jib rotation	Not applicable	135 degrees
Drive Speed - Stowed	4.8 km/h	4.8 km/h
Drive Speed - Raised	18 m/min	18 m/min
Gradeability - Stowed	40 %	40 %
Turning Radius - axles extended: Inside	2.74 m	2.59 m
Turning Radius - axles extended: Outside	6.05 m	5.74 m
Power & Weight		
Engine Type	Diesel engine	Diesel engine
Fuel Tank Capacity	151 L	151 L
Gross Weight	18,008 kg	20,248 kg
Certification		
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV

الرافعات الشخصية المتنقلة: رافعات أشخاص تلسكوبية Telescopic Boom Lifts (Man Lifts)



SAFETY NOTES:

- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



رافعات الأشخاص المقصية - الكهربائية

Scissor Lifts - Electric

Scissor Lifts - Electric

رافعات الأشخاص المقصية - الكهربائية

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Battery powered scissor lifts:** These machines are Low level, lightweight, compact and are fitted with non marking tyres which makes them ideal for working inside workhouses and confined spaces. This machine offers the capacity to lift upto 2 operators and are used for Cleaning, Electrical, Facilities management, Heating, ventilating & air conditioning, Mechanical engineering, Warehousing.

Access Platform Name	Scissor Lift, Battery: 227kg, Width 81cm, Work Height 9.92m	Scissor Lift, Battery: 454kg, Width 1.17m, Work Height 9.92m
Maker / Model	Genie GS-2632	Genie GS-2646
Working Height	9.92 m (32 ft)	9.92 m (32 ft)
Platform Height: maximum	7.92 m (26 ft)	7.92 m (26 ft)
Platform Height: stowed	1.16 m (3 ft 9.5 in)	1.16 m (3 ft 9.6 in)
Platform Length: outside	2.26 m (7 ft 5 in)	2.26 m (7 ft 5 in)
Platform Length: extended	3.18 m (10 ft 5 in)	3.18 m (10 ft 5 in)
Slide-out platform extension deck	91 cm (3 ft)	91 cm (3 ft)
Platform Width: outside	81 cm (2 ft 8 in)	1.15 m (3 ft 9.3 in)
Height - Stowed	2.26 m (7 ft 5 in)	2.26 m (7 ft 5 in)
Height - Stowed: rails lowered	1.91 m (6 ft 3 in)	1.91 m (6 ft 3 in)
Length - Stowed	2.44 m (8 ft)	2.44 m (8 ft)
Overall Width	81 cm (2 ft 8 in)	1.17 m (3 ft 10 in)
Productivity		
Maximum Number of Platform Occupants (indoor/outdoor)	2 Persons	2 Persons
Working Height	227 kg	454 kg
Platform Height: maximum	Full height	Full height
Platform Height: stowed	3.5 km/h	3.5 km/h
Platform Length: outside	0.8 km/h (13 m/minute)	0.8 km/h (13 m/minute)
Platform Length: extended	25 %	30 %
Slide-out platform extension deck	Zero	Zero
Platform Width: outside	2.13 m	2.29 m
Power & Weight		
Engine Type	24 V DC	
Fuel Tank Capacity	Four 6V 225 Ah batteries	Four 6V 225 Ah batteries
Gross Weight	1,959 kg	2,412 kg
Certification		
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV





SAFETY NOTES:

- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



رافعات الأشخاص المقصية - الكهربائية

Scissor Lifts - Electric

Scissor Lifts - Electric

رافعات الأشخاص المقصية - الكهربائية

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Battery powered scissor lifts:** These machines are Low level, lightweight, compact and are fitted with non marking tyres which makes them ideal for working inside workhouses and confined spaces. This machine offers the capacity to lift upto 3 operators and are used for Cleaning, Electrical, Facilities management, Heating, ventilating & air conditioning, Mechanical engineering, Warehousing.

Access Platform Name	Scissor Lift, Battery: 350kg, Width 1.19m, Work Height 13.93m
Maker / Model	Genie GS-4047
Working Height	13.93 m (45 ft 1.5 in)
Platform Height: maximum	11.93 m (39 ft 1.5 in)
Platform Height: stowed	1.34 m (4 ft 5 in)
Platform Length: outside	2.26 m (7 ft 5 in)
Platform Length: extended	3.18 m (10 ft 5 in)
Slide-out platform extension deck	91 cm (3 ft)
Platform Width: outside	1.15 m (3 ft 9.3 in)
Height - Stowed	2.54 m (8 ft 4 in)
Height - Stowed: rails lowered	1.88 m (6 ft 2 in)
Length - Stowed	2.44 m (8 ft)
Overall Width	1.19 m (3 ft 11 in)
Productivity	
Maximum Number of Platform Occupants	3 Persons
Working Height	350 kg
Platform Height: maximum	Full height
Platform Height: stowed	3.1 km/h
Platform Length: outside	0.8 km/h (13 m/minute)
Platform Length: extended	25 %
Slide-out platform extension deck	Zero
Platform Width: outside	2.3 m
Power & Weight	
Engine Type	24 V DC, 300 Ah
Fuel Tank Capacity	Four 12V 150 Ah batteries
Gross Weight	3,221 kg
Certification	
Certification Co.	Bureau Veritas / TUV





SAFETY NOTES:

- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



الرافعات المقصية - ديزل

Scissor Lifts - Diesel

Scissor Lifts - Diesel

الرافعات المقصية - ديزل

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **DIESEL ENGINE POWERED SCISSOR LIFTS:** are chosen for applications that require more workspace and more lifting capacities and are ideal for outdoor construction or maintenance tasks. They deliver exceptional Gradeability, making these easier to maneuver through rough terrain job sites.

Access Platform Name	Rough-Terrain Scissor Lift: 680Kg, Work Height 9.9M	Scissor Lift, Diesel: 454kg, Work Height 11.9m
Maker / Model	Genie GS-2669 RT	Genie GS-3369 RT
Working Height	9.9 m (32 ft)	11.96 m (39 ft)
Platform Height: maximum	7.9 m (26 ft)	9.96 m (32 ft 8 in)
Platform Height: stowed	1.47 m (4 ft 10 in)	1.47 m (4 ft 10 in)
Platform Length: outside	2.79 m (9 ft 2 in)	2.79 m (9 ft 2 in)
Platform Length: extended	3.71 m (12 ft 2 in)	3.71 m (12 ft 2 in)
Slide-out platform extension deck	0.91 m (3 ft)	0.91 m (3 ft)
Platform Width: outside	1.6 m (5 ft 3 in)	1.6 m (5 ft 3 in)
Height - Stowed	2.59 m (8 ft 6 in)	2.59 m (8 ft 6 in)
Height - Stowed: rails lowered	1.92 m (6 ft 4 in)	1.92 m (6 ft 4 in)
Length - Stowed	3.12 m (10 ft 3 in)	3.12 m (10 ft 3 in)
Overall Width	1.75 m (5 ft 9 in)	1.75 m (5 ft 9 in)
Productivity		
Platform occupancy (indoor/ outdoor)	4/ 4 Persons	4/ 2 Persons
Platform capacity	680 kg	454 kg
Drive Height	Full height	Full height
Drive Speed - Stowed	5.6 km/h	5.6 km/h
Drive Speed - Raised	0.5 km/h	0.5 km/h
Gradeability - Stowed	40 %	35 %
Turning Radius - Inside	2.11 m	2.11 m
Turning Radius - Outside	4.6 m	4.6 m
Power & Weight		
Engine Type	Diesel engine	Diesel engine
Fuel Tank Capacity	38 L	38 L
Gross Weight	3,701 kg	3,882 kg
Certification		
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV



الرافعات المقصية - ديزل

Scissor Lifts - Diesel



SAFETY NOTES:

- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



الرافعات المقصية - ديزل

Scissor Lifts - Diesel

Scissor Lifts - Diesel

الرافعات المقصية - ديزل

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **DIESEL ENGINE POWERED SCISSOR LIFTS:** are chosen for applications that require more workspace and more lifting capacities and are ideal for outdoor construction or maintenance tasks. They deliver exceptional Gradeability, making these easier to maneuver through rough terrain job sites.

Access Platform Name	Rough-Terrain Scissor Lift: 680kg, Work Height 18.1m
Maker / Model	Genie GS-5390 RT
Working Height	18.15 m (59 ft)
Platform Height: maximum	16.15 m (53 ft)
Platform Height: stowed	2.02 m
Platform Length: outside	3.98 m (13 ft 5 in)
Platform Length: extended	5.34 m (17 ft 6 in)
Slide-out platform extension deck	1.52 m (5 ft)
Platform Width: outside	1.83 m (6 ft)
Height - Stowed	3.15 m (10 ft 4 in)
Height - Stowed: rails lowered	2.47 m (8 ft 1 in)
Length - Stowed	4.88 m (16 ft)
Overall Width	2.29 m (7 ft 6 in)
Productivity	
Maximum Number of Platform Occupants	4 Persons
Platform capacity	680 kg
Drive Height	9.14 m (30 ft)
Drive Speed - Stowed	8.0 km/h
Drive Speed - Raised	1.1 km/h
Gradeability - Stowed	40 %
Turning Radius - Inside	2.16 m
Turning Radius - Outside	5.33 m
Power & Weight	
Engine Type	Diesel engine
Fuel Tank Capacity	113.6 L
Gross Weight	8,002 kg
Certification	
Certification Co.	Bureau Veritas / TUV



الرافعات المقصية - ديزل

Scissor Lifts - Diesel



SAFETY NOTES:

- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.






أوال
awal

شركة أوال لتأجير المعدات
Awal Equipment Hiring Company



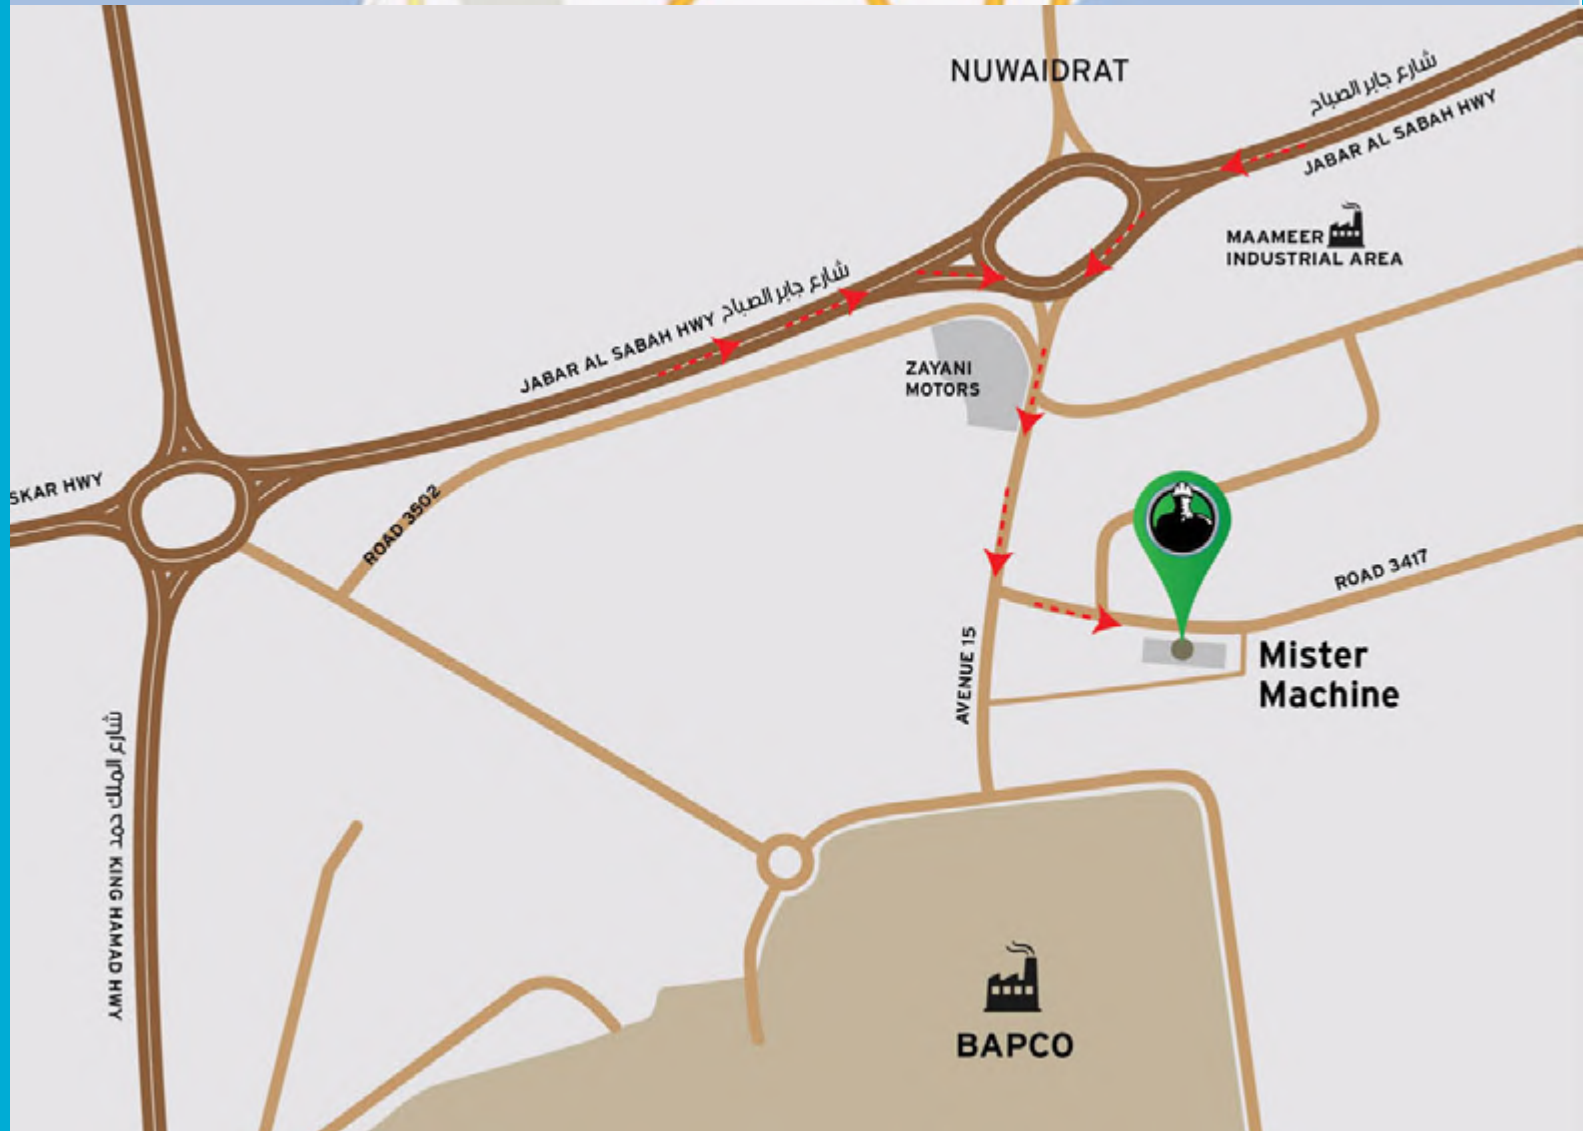



مستر مشين
Mister Machine
خدمات تأجير متميزة - Quality Equipment Hire

KINGDOM OF BAHRAIN

EQUIPMENT DIVISIONS

ACCESS PLATFORMS

+973-17708177, 17705052

FORKLIFTS

+973-17708177, 17708170

GENERATORS AND COMPRESSORS

+973-17708160, 17705059

HEAVY EQUIPMENTS

+973-17708177, 17705052

LIGHT EQUIPMENTS

+973-17705058

FORMWORK AND SCAFFOLDING

+973-17705082

PORTA CABINS

+973-17708168

RAW MATERIALS

+973-17705085, 17708173

SKIPS

+973-17708161, 17705061

TRANSPORTATION AND LOGISTICS

+973-17705069

QUALITY USED EQUIPMENT FOR SALE

+973 36757554, 17708173, +966 55 8884575

مملكة البحرين

أقسام المعدات

الرافعات الشخصية المتنقلة

+973 17708177, 17705052

الرافعات الشوكية

+973 17708177, 17708170

المولدات الكهربائية والضواغط

+973 17708160, 17705059

المعدات الثقيلة

+973 17708177, 17705052

المعدات الخفيفة

+973 17705058

القوالب والسقالات

+973 17705082

كباين متنقلة

+973 17708168

المواد الخام

+973 17705085, 17708173

حاويات الأنقاض

+973 17708161, 17705061

النقل والخدمات اللوجستية

+973 17705069

بيع المعدات المستعملة الممتازة

+973 36757554, 17708173, +966 55 8884575



BAHRAIN BRANCHES

Ma'ameer

Tel: +973 17708160, 17705082

Fax : +97317700086

Location: Bldg. 541, Rd.3417 Blk. 634,
Maameer Industrial Area

Ras Zuwayed

Tel: +973 17705070, +973 17708177

Fax: +973 17703050

Location: Bldg. 49, Avene 52,
Block 952, Ras Zuwayed



27

Access Platforms

Please call: +966 55 733 3875, +966 55 878 1119

Email: awal@mister-machine.com - website: www.mister-machine.com

