

ISO 9001

BUREAU VERITAS
Certification



قسم الرافعات الشوكية FORKLIFTS DIVISION



مستّر مشين
Mister Machine
خدمات تأجير متميزة Quality Equipment Hire

www.mister-machine.com







مستر مشين
Mister Machine
Quality Equipment Hire & Sales

Forklifts

+973 1770 8177, 1770 5052

24 Hours Maintenance
3656 6113

www.mister-machine.com

| | |
|-------------------------------------|----|
| Contact Details (Bahrain) | 4 |
| Location Map (Ma'ameer Head Office) | 5 |
| Forklifts (Electric) | 6 |
| Forklifts (Petrol/LPG) | 12 |
| Forklifts (Diesel) | 14 |
| Electric Stackers | 28 |
| Reach Trucks | 30 |
| Telescopic Handlers | 38 |
| Telescopic Handlers (Rotating) | 40 |
| Towing Tractors (Diesel) | 42 |
| Contact Details (Saudi Arabia) | 45 |
| Location Map (Saudi Arabia) | 46 |



مستر مشين
Mister Machine
Quality Equipment Hire متميزة خدمات تأجير

KINGDOM OF BAHRAIN

CONTACT DETAILS

ACCESS PLATFORMS

+973-1770 8177, 1770 8170

FORKLIFTS

+973-1770 8177, 1770 5052

GENERATORS AND COMPRESSORS

+973-1770 8168, 1770 5059

HEAVY EQUIPMENT

+973-1770 8177, 1770 8170

LIGHT EQUIPMENT

+973-1770 8168, 1770 5059

FORMWORK AND SCAFFOLDING

+973-1770 8168, 1770 5059

PORTABLE CABINS

+973-1770 8168, 1770 5059

RAW MATERIALS

+973-1770 5085, 1770 8173

SKIPS

+973-1770 5085, 3979 7404

TRANSPORTATION AND LOGISTICS

+973-1770 8177, 1770 8168

WELDING EQUIPMETN

+973-1770 8168, 1770 5059

QUALITY USED EQUIPMENT FOR SALE

+973-3975 7554, 1770 8173, 3656 6144,
+966 55 888 4575

BAHRAIN BRANCHES

Ma'ameer

Tel: +973 1770 5059, 1770 8168
Fax: +973 1770 0086
Location: Bldg. 541, Rd.3417 Blk. 634, Maameer
Industrial Area
GPS Map: 26.1267, 50.6050

Manama

Tel: +973 1724 0166
Fax: +973 1724 0155
Location: Shop 313, R. 336, Bll. 311, Manama
GPS Map: 26.2226, 50.5711

Hidd

Tel: +973 1734 5020, 1770 5057
Location Bldg. 620 B, Rd 106, Blk. HIDD 101
GPS (map) 26.2562, 50. 6698

Ras Zuwayed

Tel: +973 1770 6019, +973 1770 8177
Fax: +973 1770 3050
Location: Bldg. 49, Ave. 52, Blk. 952, Ras
Zuwayed
GPS Map: 26.0792, 50.6238

مملكة البحرين

بيانات الاتصال

الرافعات الشخصية المتنقلة

+973-1770 8177, 1770 8170

الرافعات الشوكية

+973-1770 8177, 1770 5052

المولدات الكهربائية والضواغط

+973-1770 8168, 1770 5059

المعدات الثقيلة

+973-1770 8177, 1770 8170

المعدات الخفيفة

+973-1770 8168, 1770 5059

القوالب والسقالات

+973-1770 8168, 1770 5059

كباين متنقلة

+973-1770 8168, 1770 5059

المواد الخام

+973-1770 5085, 1770 8173

حاويات الأنقاض

+973-1770 5085, 3979 7404

النقلات والخدمات اللوجستية

+973-1770 8177, 1770 8168


معدات اللحام

+973-1770 8168, 1770 5059

بيع المعدات المستعملة الممتازة

+973-3975 7554, 1770 8173, 3656 6144,
+966 55 888 4575



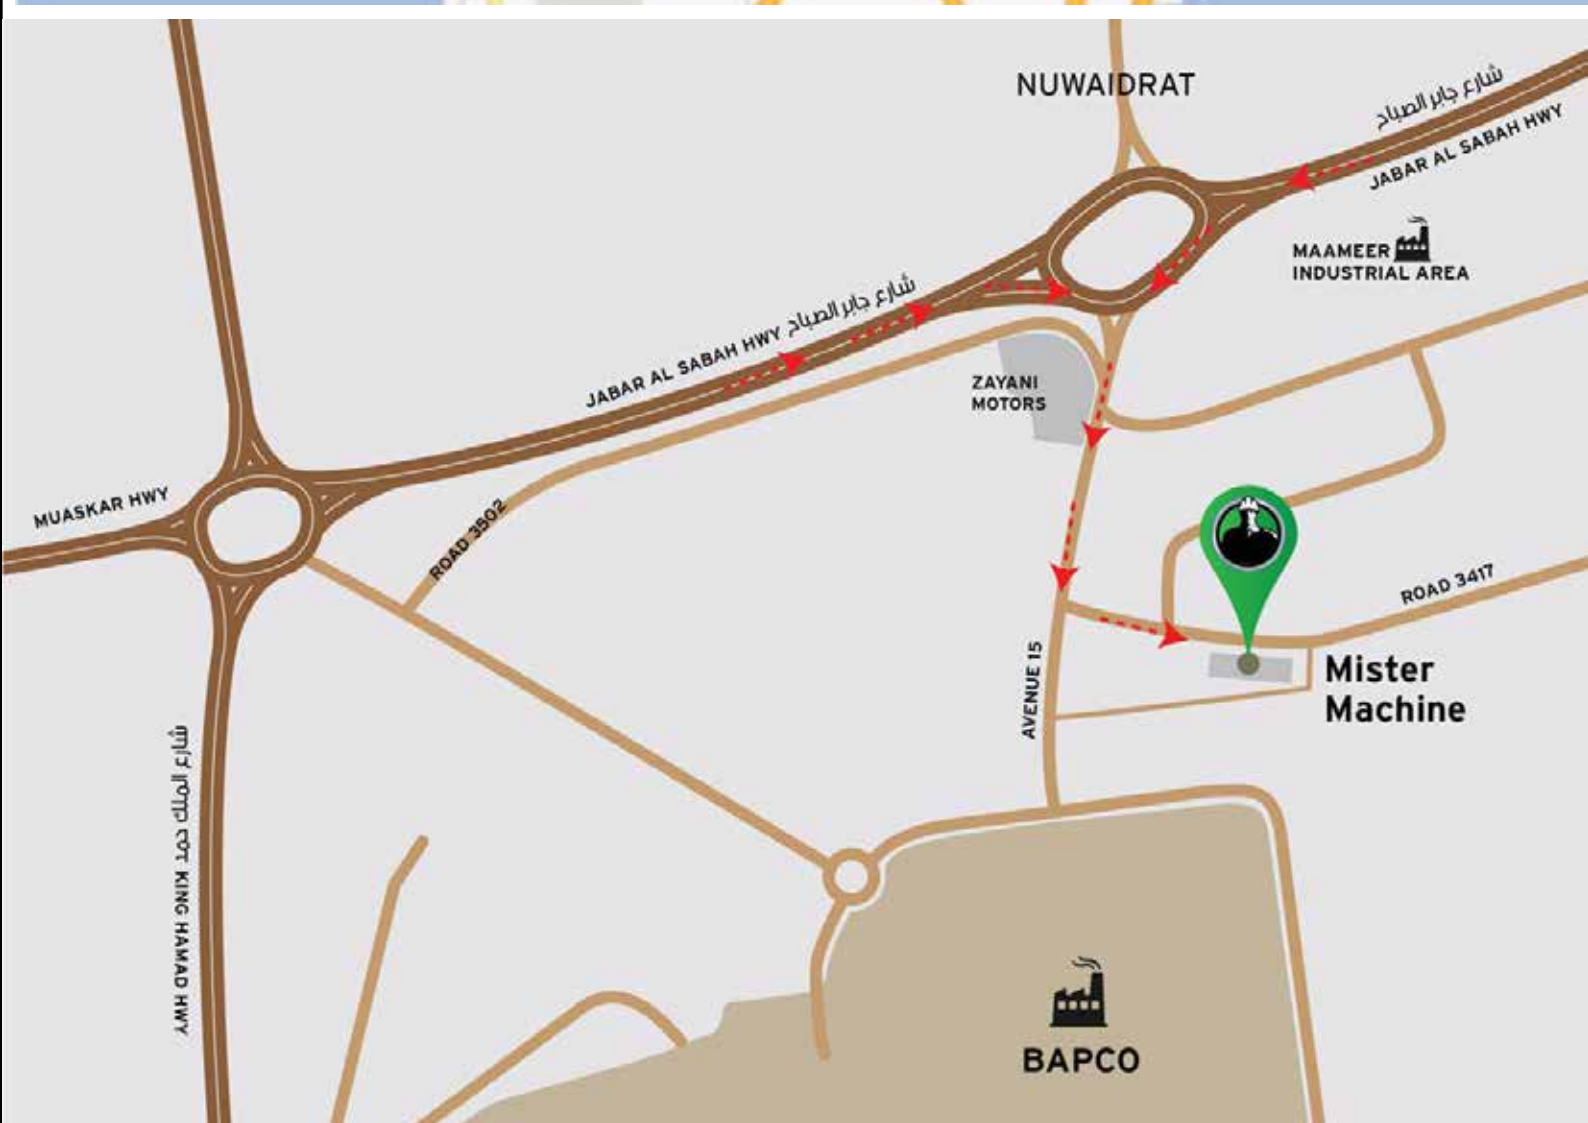

| Forklifts (Electric) | | الرافعات الشوكية (الكهربائية) |
|--|--|--|
| MISTER MACHINE® | | |
| <ul style="list-style-type: none"> QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. OPERATORS: Highly experienced / motivated operators. AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | |
| Forklifts Size | Forklifts Battery: 2.5 Tons, 4.3m Triplex Sideshift | Forklifts Battery: 2.5 Tons, 4.7m Triplex Sideshift |
| Maker / Model | Toyota 8FBN25 | Toyota 8FBN25 |
| Mast Type | 3 Stage full free lift (container stuffer) | 3 Stage full free lift |
| Rated Lift Capacity with Side-shift attachment at different Load Centers | 2,300 kg at 500 mm 2,080 kg at 600 mm 1,510 kg at 1,000 mm | 2,050 kg at 500 mm 1,850 kg at 600 mm 1,340 kg at 1,000 mm |
| Free Lift with load backrest | 0 mm | 0 mm |
| Maximum lift height | 4,300 mm | 4,700 mm |
| DIMENSIONS & WEIGHT | | |
| Length to Fork Face | 2,325 mm | 2,325 mm |
| Overall Length with 1,200 mm Forks | 3,525 mm | 3,525 mm |
| Overall width | 1,180 mm | 1,180 mm |
| Overall lowered height | 1,970 mm | 2,120 mm |
| Overall Extended Height with load backrest. | 5,550 mm | 5,950 mm |
| Unladen weight | 4,170 kg | 4,270 kg |
| ENGINE & SPEED | | |
| Power Type | Battery | Battery |
| Battery Capacity | 48V/725Ah | 48V/565Ah or 48V/725Ah |
| Maximum Travel Speed | 16.0 km/h | 16.0 km/h |
| FORKS | | |
| Standard Forks | 1220 mm (4 ft) | 1220 mm (4 ft) |
| Long Forks | 1,524 mm (5 ft) | 1,524 mm (5 ft) |
| Very Long Forks | 1,820 mm (6 ft) | 1,820 mm (6 ft) |
| Fork Spacing (Min/ Max) | 245 mm / 1020 mm | 245 mm / 1020 mm |



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Forklifts (Electric) | | الرافعات الشوكية الكهربائية | |
|---|--|--|---|
| MISTER MACHINE® | | | |
| <ul style="list-style-type: none">QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models.COMPETITIVE HIRE RATES: The Best Quality and Hire Rates.OPERATORS: Highly experienced / motivated operators.AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | | |
| Forklifts Size | Forklifts Battery: 3.0 Tons, 4.3m Triplex Sideshift | Forklifts Battery: 3.0 Tons, 4.5m Triplex Sideshift | Forklifts Battery: 3.0 Tons, 6.0m Triplex Sideshift |
| Maker / Model | Toyota 8FBN30 | Hyundai 30B-7AC | Jungheinrich EFG 430 |
| Mast Type | 3 Stage full free lift (container stuffer) | 3 Stage full free lift (container stuffer) | Stage full free lift 3 |
| Rated Lift Capacity with | 3,000 kg @ 500 mm 2,720 kg @ 600 mm 2,490 kg @ 700 mm 1,990 kg @ 1,000 mm | 2,670 kg @ 500 mm 2,450 kg @ 600 mm 2,200 kg @ 750 mm 2,000 kg @ 900 mm | 2,200 kg @ 500 mm 1,860 kg @ 600 mm 1,660 kg @ 700 mm |
| Side-shift attachment at different Load Centers | 945 mm | 922 mm | 1,472 mm |
| Free Lift with load backrest | 4,300 mm | 4,500 mm | 6,000 mm |
| MAXIMUM LIFT HEIGHT | | | |
| Length to Fork Face | 2,485 mm | 2,542 mm | 2,427 mm |
| Overall Length with 1,220mm Forks | 3,705 mm | 3,762 mm | 3647 mm |
| Overall width | 1,235 mm | 1,200 mm | 1,198 mm |
| Overall lowered height | 2,165 mm | 2,112 mm | 2,680 mm |
| Overall Extended Height with load backrest. | 5,565 mm | 5,685 mm | 6,730 mm |
| Unladen weight | 49,800 kg | 4,873 kg | 5,220 kg |
| ENGINE & SPEED | | | |
| Power Type | Battery | Battery | Battery |
| Battery Capacity | 80 V / 470 AH | 48 V / 750 AH | 80 V / 775 AH |
| Maximum Travel Speed | 18.0 km/h | 18.0 km/h | 20.0 km/h |
| FORKS | | | |
| Standard Forks | 1220 mm (4 ft) | 1220 mm (4 ft) | 1150 mm |
| Long Forks | 1,524 mm (5 ft) | 1,524 mm (5 ft) | 1,524 mm (5 ft) |
| Very Long Forks | 1,830 mm (6 ft) | 1,830 mm (6 ft) | 1,830 mm (6 ft) |
| Fork Spacing (Min./ Max.) | 245/ 1,070 mm | 240/ 1,070 mm | 250/ 1,000 mm |





NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Forklifts (Electric) | | الرافعات الشوكية الكهربائية |
|---|--|-----------------------------|
| MISTER MACHINE® | | |
| <ul style="list-style-type: none">• QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models.• COMPETITIVE HIRE RATES: The Best Quality and Hire Rates.• OPERATORS: Highly experienced / motivated operators.• AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | |
| Forklifts Size | Forklifts Battery: 3.5 Ton, 6.0m Triplex Sideshift | |
| Maker / Model | Hyundai 35B-9AC | |
| Mast Type | Stage full free lift 3 | |
| Rated Lift Capacity with | 2,950 kg @ 500 mm 2,850 kg @ 600 mm 2,540 kg @ 750 mm 2,380 kg @ 900 mm | |
| Side-shift attachment at different Load Centers | 1,563 mm | |
| Free Lift with load backrest | 6,000 mm | |
| MAXIMUM LIFT HEIGHT | | |
| Length to Fork Face | 2,590 mm | |
| 1,220mm Forks Overall Length with | 3,810 mm | |
| Overall width | 1,250 mm | |
| Overall lowered height | 2,743 mm | |
| Overall Extended Height with load backrest. | 7,190 mm | |
| Unladen weight with Battery | 6,826 kg | |
| ENGINE & SPEED | | |
| Power Type | Battery | |
| Battery Capacity | 48 V / 740 AH | |
| Maximum Travel Speed | 18.0 km/h | |
| FORKS | | |
| Standard Forks | 1220 mm (4 ft) | |
| Long Forks | 1,524 mm (5 ft) | |
| Very Long Forks | 1,830 mm (6 ft) | |
| Fork Spacing (Min./ Max.) | 240/ 1,070 mm | |



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| الرافعات المخازن الشوكية الكهربائية | |
|---|--|
| Forklifts (Petrol/LPG) | |
| MISTER MACHINE® <ul style="list-style-type: none"> QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. OPERATORS: Highly experienced / motivated operators. AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | |
| Forklifts Size | Forklifts Petrol/LPG: 3.0 Ton, 4.5m Triplex Sideshift |
| Maker / Model | Toyota 32-8FG30 |
| Mast Type | Stage full free lift (container stuffer 3) |
| Rated Lift Capacity with side-shifter at different Load Centers | 2,700 kg at 500 mm 2,460 kg at 600 mm 1,830 kg at 1,000 mm |
| Free Lift with load backrest | 995 mm |
| Maximum lift height | 4,500 mm |
| DIMENSIONS & WEIGHT | |
| Length to Fork Face | 2,795 mm |
| 1220mm Forks Overall length with | 4,015 mm |
| Overall width | 1,240 mm |
| Overall lowered height | 2,215 mm |
| Overall Extended Height with the load backrest | 5,720 mm |
| Unladen weight | 4,690 kg |
| ENGINE & SPEED | |
| Engine Type | Petrol/ LPG engine |
| Engine Power | 58 HP (43 kW) |
| Maximum Travel Speed | 19 km/h |
| FORKS | |
| Standard Forks | 1220 mm (4 ft) |
| Long Forks | 1,524 mm (5 ft) |
| Very Long Forks | 1,820 mm (6 ft) |
| Fork Spacing (Min./ Max.) | 240 mm / 1,070 mm |



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Forklifts (Diesel) | | الرافعات الشوكية (ديزل) |
|--|---|---|
| MISTER MACHINE® | | |
| <ul style="list-style-type: none"> QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. OPERATORS: Highly experienced / motivated operators. AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | |
| Forklifts Name | Forklifts Diesel: 3.0 Ton, 4.3m Triplex Sideshift | Forklifts Diesel: 3.0 Ton, 5.0m Triplex Sideshift |
| Maker / Model | Toyota 62-8FD30 | Hyundai 30 DF-7 |
| Mast Type | 3 Stage full free lift (container stuffer) | 3 Stage full free lift |
| Rated Lift Capacity with Side-shifter at different Load Centers | 3,000 kg at 500 mm 2,730 kg at 600 mm 2,010 kg at 1000 mm | 2,580 kg at 500 mm 2,350 kg at 600 mm 1,800 kg at 1000 mm |
| Free Lift with load backrest | 945 mm | 1,110 mm |
| Maximum lift height | 4,300 mm | 5,000 mm |
| DIMENSIONS & WEIGHT | | |
| Length to Fork Face | 2,770 mm | 2,690 mm |
| Overall length with 1220mm Forks | 3,990 mm | 3,910 mm |
| Overall width | 1,240 mm | 1,230 mm |
| Overall lowered height | 2,170 mm | 2,290 mm |
| Overall Extended Height with the load backrest | 5,520 mm | 5,840 mm |
| Unladen weight | 4,620 kg | 4,534 kg |
| ENGINE & SPEED | | |
| Engine Type | Diesel engine | Diesel engine |
| Engine Power | 59 HP (44 kW) | 52 HP (39 kW) |
| Maximum Travel Speed | 18 km/h | 18.5 km/h |
| FORKS | | |
| Standard Forks | 1220 mm (4 ft) | 1220 mm (4 ft) |
| Long Forks | 1,524 mm (5 ft) | 1,524 mm (5 ft) |
| Very Long Forks | 1,830 mm (6 ft) | 1,830 mm (6 ft) |
| Minimum Fork Spacing | 240/ 1,070 mm | 250/ 1,000 mm |



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Forklifts (Diesel) | | الرافعات الشوكية (ديزل) | |
|---|---|---|---|
| MISTER MACHINE® | | | |
| <ul style="list-style-type: none">• QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models.• COMPETITIVE HIRE RATES: The Best Quality and Hire Rates.• OPERATORS: Highly experienced / motivated operators.• AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | | |
| Forklifts Name | Forklifts Diesel: 5.0 Ton, 3.7m Duplex Sideshift | Forklifts Diesel: 5.0 Ton, 4.0m Duplex Sideshift | Forklifts Diesel: 5.0 Ton, 4.0m Triplex Sideshift |
| Front Tyres | Single Front Tyres | Single Front Tyres | Single Front Tyres |
| Maker / Model | Toyota 7FDA50, 8FD50N | Toyota 8FD50N | Toyota 7FDA50 |
| Mast Type | Stage View Mast 2 with side shift | Stage View Mast 2 with side shift | Stage full free lift 3 with side shift |
| Rated Lift Capacity with Side-shifter at different Load Centers | 4,570 kg at 600 mm 4,250 kg at 700 mm 3,100 kg at 1200 mm | 4,570 kg at 600 mm 4,250 kg at 700 mm 3,100 kg at 1200 mm | 4,470 kg at 600 mm 4,170 kg at 700 mm 3,070 kg at 1200 mm |
| Free Lift with load backrest | 125 mm | 125 mm | 900 mm |
| Maximum lift height | 3,700 mm | 4,000 mm | 4,000 mm |
| DIMENSIONS & WEIGHT | | | |
| Length to Fork Face | 3,170 mm | 3,170 mm | 3,170 mm |
| Overall length with 1830mm Forks | 5,000 mm | 5,000 mm | 5,000 mm |
| Overall width | 1,450 mm | 1,450 mm | 1,450 mm |
| Overall lowered height | 2,800 mm | 3,050 mm | 2,270 mm |
| Overall Extended Height with the backrest extension | 5,135 mm | 5,435 mm | 5,435 mm |
| Unladen weight | 7,570 kg | 7,630 kg | 7,800 kg |
| ENGINE & SPEED | | | |
| Engine Type | Diesel engine | Diesel engine | Diesel engine |
| Engine Power | 75 HP (56 kW) | 75 HP (56 kW) | 75 HP (56 kW) |
| Maximum Travel Speed | 24 km/h | 24 km/h | 24 km/h |
| FORKS | | | |
| Standard Forks | 1220 mm (4 ft) | 1220 mm (4 ft) | 1220 mm (4 ft) |
| Long Forks | 1,830 mm (6 ft) | 1,830 mm (6 ft) | 1,830 mm (6 ft) |
| Very Long Forks | 2,440 mm (8 ft) | 2,440 mm (8 ft) | 2,440 mm (8 ft) |
| Fork Spacing (Min./ Max.) | 300 mm / 1,160 mm | 300 mm / 1,160 mm | 300 mm / 1,160 mm |



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Forklifts (Diesel) | | الرافعات الشوكية (ديزل) |
|--|---|--|
| MISTER MACHINE® | | |
| <ul style="list-style-type: none"> QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. OPERATORS: Highly experienced / motivated operators. AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | |
| Forklifts Name | Forklifts Diesel: 7.0 Ton, 3.7m Duplex Sideshift | Forklifts Diesel: 7.0 Ton, 4.0m Duplex Sideshift |
| Maker / Model | Toyota 8FD70N | Hyundai 70DF-7 |
| Mast Type | Stage View Mast with side shift 2 | Stage View Mast with side shift 2 |
| Rated lift capacity with side-shifter at different load centers | 6,370 kg at 600 mm 5,920 kg at 700 mm 4,320 kg at 1200 mm | 7000 kg at 600 mm 6,500 kg at 700 mm 5,000 kg at 1200 mm |
| Free lift with load backrest | 125 mm | 140 mm |
| Maximum lift height | 3,700 mm | 4,000 mm |
| DIMENSIONS & WEIGHT | | |
| Length to Fork Face | 3,545 mm | 3,615 mm |
| Overall length with 1830 mm Forks | 5,275 mm | 5,445 mm |
| Overall width | 1,965 mm | 2,068 mm |
| Overall lowered height | 3,060 mm | 3,015 mm |
| Overall Extended Height with backrest | 5,435 mm | 5,320 mm |
| Unladen weight | 9,650 kg | 10,038 mm |
| ENGINE & SPEED | | |
| Engine Type | Diesel engine | Diesel engine |
| Engine Power | 88.5 HP (66 kW) | 99 HP (73.6 kW) |
| Maximum Travel Speed | 20.5 km/h | 22.7 km/h |
| FORKS | | |
| Standard Forks | 1220 mm (4 ft) | 1220 mm (4 ft) |
| Long Forks | 1,830 mm (6 ft) | 1,830 mm (6 ft) |
| Very Long Forks | 2,440 mm (8 ft) | 2,440 mm (8 ft) |
| Fork Spacing (Min./ Max.) | 300/ 1,700 mm | 300/ 1,700 mm |



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| الرافعات الشوكية (ديزل) | |
|---|---|
| Forklifts (Diesel) | |
| MISTER MACHINE® <ul style="list-style-type: none"> QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. OPERATORS: Highly experienced / motivated operators. AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | |
| Forklifts Name | Forklifts Diesel: 8.0 Ton, 3.5m Duplex Sideshift |
| Maker / Model | Komatsu FD 80-8 |
| Mast Type | 2 Stage View Mast with side shift |
| Rated Lift Capacity with Side-shifter at different Load Centers | 7,900 kg at 600 mm 6,900 kg at 900 mm 5,400 kg at 1200 mm |
| Free Lift with load backrest | 220 mm |
| Maximum lift height | 3,500 mm |
| DIMENSIONS & WEIGHT | |
| Length to fork face | 3,670 mm |
| Overall length with 1830 mm Forks | 5,500 mm |
| Overall width | 2,050 mm |
| Overall lowered height | 2,960 mm |
| Overall Extended Height with backrest | 4,850 mm |
| Unladen weight | 11,550 mm |
| ENGINE & SPEED | |
| Engine Type | Diesel engine |
| Engine Power | 93 HP (69kW) |
| Maximum Travel Speed | 31 km/h |
| FORKS | |
| Standard Forks | 1220 mm (4 ft) |
| Long Forks | 1,830 mm (6 ft) |
| Very Long Forks | 2,440 mm (8 ft) |
| Fork Spacing (Minimum/ Maximum) | 300 / 1800 mm |



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Forklifts (Diesel) | | الرافعات الشوكية (ديزل) |
|--|---|---|
| MISTER MACHINE® | | |
| <ul style="list-style-type: none"> QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. OPERATORS: Highly experienced / motivated operators. AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | |
| Forklift Name | Forklift Diesel: 10.0 Ton, 3.7m Duplex Sideshift | Forklift Diesel: 10.0 Ton, 3.7m Duplex Sideshift |
| Maker / Model | Komatsu FD100-8 | Toyota FD100T |
| Mast Type | 2 Stage View Mast with side-shift | 2 Stage View Mast with side-shift |
| Rated Lift Capacity with Side-shifter at different Load Centers | 9,500 kg at 600 mm 7,700 kg at 900 mm 6,460 kg at 1200 mm | 9,500 kg at 600 mm 7,700 kg at 900 mm 6,460 kg at 1200 mm |
| Free Lift with load backrest | 0 mm | 0 mm |
| Maximum lift height | 3,700 mm | 3,700 mm |
| DIMENSIONS & WEIGHT | | |
| Length to Fork Face | 4,245 mm | 4,200 mm |
| Overall length with 2440mm Forks | 6,685 mm | 6,640 mm |
| Overall width | 2,280 mm | 2,315 mm |
| Overall lowered height | 3,240 mm | 3,255 mm |
| Overall Extended Height with backrest | 5,100 mm | 5,105 mm |
| Unladen weight | 12,800 kg | 13,570 kg |
| ENGINE & SPEED | | |
| Engine Type | Diesel engine | Diesel engine |
| Engine Power | 164 HP (122 kW) | 168 HP (125 kW) |
| Maximum Travel Speed | 32 km/h | 32 km/h |
| FORKS | | |
| Standard Forks | 1,830 mm (6 ft) | 1,830 mm (6 ft) |
| Long Forks | 2,440 mm (8 ft) | 2,440 mm (8 ft) |
| Fork Spacing (Minimum) | 410 mm | 420 mm |
| Fork Spacing (Maximum) | 2,140 mm | 2,140 mm |



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Forklifts (Diesel) | | الرافعات الشوكية (ديزل) |
|---|---|-------------------------|
| MISTER MACHINE® | | |
| <ul style="list-style-type: none">QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models.COMPETITIVE HIRE RATES: The Best Quality and Hire Rates.OPERATORS: Highly experienced / motivated operators.AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | |
| Forklifts Name | Forklift Diesel: 11.0 Tons, 4.0m Duplex Sideshift | |
| Maker / Model | Hyundai 110D-7E (A/C) | |
| Mast Type | 2 Stage View Mast with side-shift | |
| Rated Lift Capacity with Side-shifter at different Load Centers | 11,000 kg at 600 mm 10,000 kg at 700 mm 9,100 kg at 1000 mm | |
| Free Lift with load backrest | 0 mm | |
| Maximum lift height | 4,000 mm | |
| DIMENSIONS & WEIGHT | | |
| Length to fork face | 4,340 mm | |
| Overall length with 1830 mm Forks | 6,780 mm | |
| Overall width | 2,450 mm | |
| Overall lowered height | 3,550 mm | |
| Overall Extended Height with backrest | 5,465 mm | |
| Unladen weight | 17,017 kg | |
| ENGINE & SPEED | | |
| Engine Type | Diesel engine | |
| Engine Power | 160 HP (119 kW) | |
| Maximum Travel Speed | 34.7 km/h | |
| FORKS | | |
| Standard Forks | 1,830 mm (6 ft) | |
| Long Forks | 2,440 mm (8 ft) | |
| Very Long Forks | 500 mm | |
| Fork Spacing (Minimum/ Maximum) | 2,357 mm | |



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Forklifts (Diesel) | | الرافعات الشوكية (ديزل) | |
|---|---|---|--|
| MISTER MACHINE® | | | |
| <ul style="list-style-type: none">• QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models.• COMPETITIVE HIRE RATES: The Best Quality and Hire Rates.• OPERATORS: Highly experienced / motivated operators.• AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | | |
| Forklift Name | Forklift diesel: 16.0 Ton, 4.0m Duplex sideshift | Forklift diesel: 16.0Ton, 4.0m Duplex sideshift | Forklift diesel: 16.0 Ton, 4.5m Triplex sideshift |
| Maker / Model | Toyota 4FDK160 (A/C) | Hyundai 160D-7E (A/C) | Hyundai 160D-7E (A/C) |
| Mast Type | 2 Stage view mast with side shift and fork positioner | 2 Stage view mast with side shift and fork positioner | 3 Stage full free lift with side shift and fork positioner |
| Rated Lift Capacity with side-shift/ fork positioner at different Load Centers | 15,000 kg at 600mm 12,400 kg at 900mm 10,600 kg at 1200mm | 15,200 kg at 600mm 13,800 kg at 700mm 12,600 kg at 1000mm | 14,800 kg at 600mm 13,400 kg at 700mm 12,200 kg at 1000mm |
| Free Lift with load backrest | 0 mm | 0 mm | 1,790 mm |
| Maximum lift height | 4,000 mm | 4,010 mm | 4,500 mm |
| DIMENSIONS & WEIGHT | | | |
| Length to Fork Face | 4,700 mm | 4,905 mm | 4,905 mm |
| Overall length with 2440mm Forks | 7,140 mm | 7,345 mm | 7,345 mm |
| Overall width | 2,485 mm | 2,497 mm | 2,497 mm |
| Overall lowered height | 3,670 mm | 3,750 mm | 2,950 mm |
| Overall Extended Height with backrest | 5,670 mm | 5,710 mm | 6,204 mm |
| Unladen weight | 20,030 kg | 20,725 kg | 21,573 kg |
| ENGINE & SPEED | | | |
| Engine Type | Diesel engine | Diesel engine | Diesel engine |
| Engine Power | 167 HP (125 kW) | 160 HP (119 kW) | 160 HP (119 kW) |
| Maximum Travel Speed | 34.0 km/h | 33.6 km/h | 33.6 km/h |
| FORKS | | | |
| Long Forks | 2,440 mm (8 ft) | 2,440 mm (8 ft) | 2,440 mm (8 ft) |
| Fork Spacing - Minimum | 500 mm | 500 mm | 500 mm |
| Fork Spacing - Maximum | 2,210 mm | 2,497 mm | 2,497 mm |



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Electric Stackers | | رافعات المخازن الشوكية (الكهربائية) | |
|---|--|---------------------------------------|--|
| MISTER MACHINE® | | | |
| <ul style="list-style-type: none">• QUALITY EQUIPMENT HIRE: All our Electric Stackers are of the best quality, maintained to the highest standard, all our Electric Stackers are the latest models.• COMPETITIVE HIRE RATES: The Best Quality and Hire Rates.• OPERATORS: Highly experienced / motivated operators.• AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | | |
| Electric Stacker Name | | Stacker Battery: 1.0 Ton, 3.3m Duplex | |
| Maker / Model | | BT SWE 100 | |
| Mast Type | | 2 Stage View Mast | |
| Rated Lift Capacity with side shift attachment | | 1,000 kg at 500 mm load centre | |
| Maximum lift height | | 3,300 mm | |
| DIMENSIONS & WEIGHT | | | |
| Length to Fork Face (including stand) | | 1200 mm | |
| Overall width | | 800 mm | |
| Overall lowered height | | 2750 mm | |
| Overall Extended Height with the backrest extension | | 3730 mm | |
| Unladen weight with Battery | | 800 kg | |
| ENGINE & SPEED | | | |
| Power Type | | Battery | |
| Battery Capacity | | 24 V/A | |
| Maximum Travel Speed | | Walk behind | |
| FORKS | | | |
| Forks length | | 1150 mm | |
| Fork Spacing (fixed) | | 570 mm | |



NOTES:

- All our Electric Stackers are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Reach Trucks (Electric) رافعات المخازن الشوكية (الكهربائية) | |
|--|--|
| MISTER MACHINE® | |
| <ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our Reach Stackers are of the best quality, maintained to the highest standard, all our Reach Stackers are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | |
| Reach Truck Size | Reach Truck Battery: 1.4Ton, 4.7m Triplex Sideshift |
| Maker / Model | Toyota 6FBRE14 |
| Mast Type | 3 Stage full free lift (container stuffer) |
| Rated Lift Capacity with side shift attachment | 1,350 kg at 600 mm load centre 1,170 kg at 700 mm load centre 1,050 kg at 800 mm load centre |
| Maximum lift height | 4,700 mm |
| Free Lift with load backrest | 1,295 mm |
| Operator Position | Rider Seated |
| DIMENSIONS & WEIGHT | |
| Length to Fork Face | 1,145 mm |
| Overall width | 1,250 mm |
| Overall lowered height | 2,145 mm |
| Overall Extended Height with backrest | 5,550 mm |
| Unladen weight | 2,610 kg |
| ENGINE & SPEED | |
| Power Type | Battery |
| Battery Capacity | 48V / 360 A |
| Maximum Travel Speed | 10 km/h |
| FORKS | |
| Forks length | 1,070 mm |
| Minimum Fork Spacing | 220 mm |
| Maximum Fork Spacing | 850 mm |



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Reach Trucks (Electric) | | رافعات المخازن الشوكية (الكهربائية) | |
|---|---|--|--|
| MISTER MACHINE® | | | |
| <ul style="list-style-type: none">• QUALITY EQUIPMENT HIRE: All our Reach Trucks are of the best quality, maintained to the highest standard, all our Reach Trucks are the latest models.• COMPETITIVE HIRE RATES: The Best Quality and Hire Rates.• OPERATORS: Highly experienced / motivated operators.• AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | | |
| Reach Truck Size | Reach Truck Battery: 1.6 Ton, 4.8m Triplex Sideshift | Reach Truck Battery: 1.6 Ton, 5.7m Triplex Sideshift | Reach Truck Battery: 1.6 Ton, 6.0m Triplex Sideshift |
| Maker / Model | Toyota 6FBRE16 | Toyota 6FBRE16 | Toyota 6FBRE16 |
| Mast Type | 3 Stage full free lift (container stuffer) | 3 Stage full free lift | 3 Stage full free lift |
| Rated Lift Capacity with Side-shift attachment at different Load Centers | 1,600kg at 600 mm 1,390kg at 700 mm 1,230kg at 800 mm | 1,600 kg at 600 mm 1,390 kg at 700 mm 1,230 kg at 800 mm | 1,500 kg at 600 mm 1,340 kg at 700 mm 1,210 kg at 800 mm |
| Maximum lift height | 4,800 mm | 5,700 mm | 6,000 mm |
| Free Lift with load backrest | 1,550 mm | 1,850 mm | 1,745 mm |
| Operator Position | Rider Seated | Rider Seated | Rider Seated |
| DIMENSIONS & WEIGHT | | | |
| Length to Fork Face | 1,286 mm | 1,145 mm | 1,145 mm |
| Overall Length with Forks | 2,436 mm | 2,295 mm | 2,215 mm |
| Overall width | 1,270 mm | 1,250 mm | 1,250 mm |
| Overall lowered height | 2,182 mm | 2,245 mm | 2,595 mm |
| Overall Extended Height with backrest | 5,432 mm | 5,850 mm | 6,850 mm |
| Unladen weight | 3,035 kg | 3,020 kg | 3,500 kg |
| ENGINE & SPEED | | | |
| Power Type | Battery | Battery | Battery |
| Battery Capacity | 48V / 360 AH | 48V / 420 AH | 48V / 420 AH |
| Maximum Travel Speed | 10 km/h | 10 km/h | 10 km/h |
| FORKS | | | |
| Forks length | 1150 mm | 1150 mm | 1070 mm |
| Minimum Fork Spacing | 272 mm | 220 mm | 220 mm |
| Maximum Fork Spacing | 718 mm | 850 mm | 850 mm |



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Reach Trucks (Electric) | | رافعات المخازن الشوكية (الكهربائية) |
|--|---|---|
| MISTER MACHINE® | | |
| <ul style="list-style-type: none"> QUALITY EQUIPMENT HIRE: All our Reach Trucks are of the best quality, maintained to the highest standard, all our Reach Trucks are the latest models. COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. OPERATORS: Highly experienced / motivated operators. AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | |
| Reach Truck Size | Reach Truck Battery: 1.7 Ton, 6.5m Triplex Sideshift | Reach Truck Battery: 1.7 Ton, 7.1m Triplex Sideshift |
| Maker / Model | Still FM-X17 | Still FM-X17 |
| Mast Type | 3 Stage full free lift | 3 Stage full free lift |
| Rated Lift Capacity with side shift attachment | 1,700kg at 600 mm 1,500kg at 700 mm 1,340kg at 800 mm | 1,700kg at 600 mm 1,500kg at 700 mm 1,340kg at 800 mm |
| Maximum lift height | 6,500 mm | 7,100 mm |
| Free Lift with load backrest | 2,140 mm | 2,340 mm |
| Operator Position | Rider Seated | Rider Seated |
| OPERATOR POSITION | | |
| Length to Fork Face | 1,262 mm | 1,262 mm |
| Overall Length with Forks | 2,412 mm | 2,412 mm |
| Overall width | 1,140 mm | 1,140 mm |
| Overall lowered height | 2,700 mm | 2,900 mm |
| Overall Extended Height with backrest | 7,060 mm | 7,660 mm |
| Unladen weight | 3,594 kg | 3,740 kg |
| ENGINE & SPEED | | |
| Power Type | Battery | Battery |
| Battery Capacity | 48V / 620 AH | 48V / 620 AH |
| Maximum Travel Speed | 10 km/h | 10 km/h |
| FORKS | | |
| Forks length | 1150 mm | 1150 mm |
| Minimum Fork Spacing | 316 mm | 316 mm mm |
| Maximum Fork Spacing | 760 mm | 760 mm |



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

| Reach Trucks (Electric) | | الرافعات الشوكية (الكهربائية) | |
|---|---|---|--|
| MISTER MACHINE® | | | |
| <ul style="list-style-type: none">• QUALITY EQUIPMENT HIRE: All our Reach Trucks are of the best quality, maintained to the highest standard, all our Reach Trucks are the latest models.• COMPETITIVE HIRE RATES: The Best Quality and Hire Rates.• OPERATORS: Highly experienced / motivated operators.• AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. | | | |
| Reach Truck Size | Reach Truck Battery: 2.0 Ton, 5.0m Triplex Sideshift | Reach Truck Battery: 2.0 Ton, 6.3m Triplex Sideshift | Reach Truck Battery: 2.0 Ton, 8.0m Triplex Sideshift |
| Maker / Model | Toyota 6FBRE20 | Toyota 8FBRE20 | Toyota 6FBRE20 |
| Mast Type | 3 Stage full free lift (container stuffer) | 3 Stage full free lift | 3 Stage full free lift |
| Rated Lift Capacity with side shift attachment | 2,000 kg at 600 mm 1,770 kg at 700 mm 1,320 kg at 1000 mm | 2,000 kg at 600 mm 1,770 kg at 700 mm 1,320 kg at 1000 mm | 1,350 kg at 600 mm load centre 1,250 kg at 700 mm load centre |
| Maximum lift height | 5,000 mm | 6,300 mm | 8,000 mm |
| Free Lift with load backrest | 1,365 mm | 2,225 mm | 2,715 mm |
| Operator Position | Rider Seated | Rider Seated | Rider Seated |
| OPERATOR POSITION | | | |
| Length to Fork Face | 1,250 mm | 1214 mm | 1,250 mm |
| Overall Length with Forks | 2,320 mm | 2364 mm | 2,320 mm |
| Overall width | 1,250 mm | 1,270 mm | 1,250 mm |
| Overall lowered height | 2,215 mm | 2,732 mm | 3,565 mm |
| Overall Extended Height with backrest | 5,850 mm | 6,846 mm | 8,850 mm |
| Unladen weight | 3,800 kg | 4,203 kg | 4,900 kg |
| ENGINE & SPEED | | | |
| Power Type | Battery | Battery | Battery |
| Battery Capacity | 48V / 420 AH | 48V / 600 AH | 48V / 600 AH |
| Maximum Travel Speed | 10 km/h | 10 km/h | 10 km/h |
| FORKS | | | |
| Forks length | 1,070 mm | 1,150 mm | 1,070 mm |
| Minimum Fork Spacing | 245 mm | 272 mm | 245 mm |
| Maximum Fork Spacing | 820 mm | 820 mm | 820 mm |



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Telescopic Handler (Loadall)

الرافعات التلسكوبية

MISTER MACHINE®

- **QUALITY EQUIPMENT HIRE:** All our Reach Trucks are of the best quality, maintained to the highest standard, all our Reach Trucks are the latest models.
- **COMPETITIVE HIRE RATES:** The Best Quality and Hire Rates.
- **OPERATORS:** Highly experienced / motivated operators.
- **AVAILABILITY:** We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia.

| Telescopic Handler Size | 3.5 Tons With 12.5 M Lift Height | 4.0 Tons With 16.7 M Lift Height |
|----------------------------------|-------------------------------------|-------------------------------------|
| Maker / Model | (JCB Loadall 535-125) | (JCB Loadall 540-170) |
| Overall Length to front carriage | 5,840 mm | 6,360 mm |
| Overall Width | 2,350 mm | 2,440 mm |
| Travel Height (folded) | 2,590 mm | 2,690 mm |
| Operational Weight | 9,140 kg | 12,160 kg |
| Maximum Travel Speed | 25 km/h | 25 km/h |
| Gross Power | 62.0 kW (82.5 HP) | 76.1 kW (102 HP) |
| Fuel Tank Capacity | 125 litres | 125 litres |

LIFT PERFORMANCE WITH STABILISERS EXTENDED:

| | | |
|------------------------------|--------------------|--------------------|
| Maximum lift capacity | 3,500 kg | 4,000 kg |
| Lift capacity to full height | 3,200 kg to 12.5 m | 2,500 kg to 16.7 m |
| Lift capacity at full reach | 1,200 kg at 8.0 m | 600 kg at 12.5 m |
| Lift height | 12.3 m | 16.7 m |
| Maximum forward reach | 8.0 m | 12.5 m |

ATTACHMENTS:

| FORKS | | |
|-----------------------|----------------------|----------------------|
| Forks Length | 1100 mm | 1100 mm |
| Maximum Forks Spacing | 1,100 | 1,100 |
| FRONT SHOVEL | | |
| Front Shovel Capacity | 1.0 cu. m | 1.0 cu. m |
| Front Shovel Width | 2350 mm | 2350 mm |
| MAN BASKET (EXTRA) | | |
| Dimensions (LxWxH) | 1100 x 1100 x1800 mm | 1100 x 1100 x1800 mm |
| CRANE HOOK (EXTRA) | | |
| Maximum Lift Capacity | 3500 kg | 4000 kg |





| Telescopic Handler (Rotating) | | الرافعات التلسكوبية (المحورية) |
|----------------------------------|--|---------------------------------|
| Telescopic Handler Size | | 5.0m Tons with 21.9 Lift Height |
| Maker / Model | | (Genie Rotating GTH-5022 R) |
| Overall Length to front carriage | | 7,700 mm |
| Overall Width | | 2,490 mm |
| Travel Height (folded) | | 3,050 mm |
| Operational Weight | | 19,250 kg |
| Maximum Travel Speed | | 30 km/h |
| Gross Power | | 116.5 kW (156 HP) |
| Fuel Tank Capacity | | 125 litres |

LIFT PERFORMANCE WITH STABILISERS EXTENDED

| | |
|------------------------------|--------------------|
| Maximum lift capacity | 5,000 kg |
| Lift capacity at full height | 2,500 kg at 21.9 m |
| Lift capacity at full reach | 400 kg at 18.93 m |
| Lift height | 21.93 m |
| Maximum forward reach | 18.93 m |

ATTACHMENTS

| FORKS | |
|--|--------------------------------|
| Forks Length | 1200mm |
| Maximum Forks Spacing | 1,100 |
| FRONT SHOVEL | |
| Front shovel capacity | 1.0 cu. m |
| Front shovel width | 2350 mm |
| ROTATING & EXTENDABLE MAN-PLATFORM (EXTRA) | |
| Dimensions (LxW) | 2300 x 1000 mm |
| Platform Lift Capacity | 200 kg (suitable for 2 person) |
| HYDRAULIC CRANE WINCH (EXTRA) | |
| Maximum Lift Capacity | 3000 kg |



| Towing Tractors (Diesel) | | جرات القطر (ديزل) |
|--|--------------------------------------|---------------------------------|
| MISTER MACHINE® <ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Telescopic Handlers (Loadalls), All our Telescopic Handlers are the latest models. • OPERATORS: Highly Experienced / Motivated Operators. • EXTRA: Highly All our Telescopic Handlers are fitted with Air Conditioning. This is to improve the Operator's Comfort and the Quality of the work output. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia. | | |
| Forklifts Name | | Towing Tractor Diesel: 2.5 Tons |
| Maker / Model | | Toyota 2TD25 |
| Maximum Drawbar Pull | | 2,500 kg |
| Towed weight at dry even concrete surfaces | with one trailer | 33,000 kg |
| | with a train of two or more trailers | 49,000 kg |
| DIMENSIONS & WEIGHT | | |
| Overall length | | 3,130 mm |
| Overall width | | 1,420 mm |
| Overall height | | 1,390 mm |
| Wheelbase | | 1,710 mm |
| Underclearance | | 150 mm |
| Center height of drawbar | | 450 mm |
| Unladen weight | | 4,140 kg |
| Unladen weight | | 11,550 mm |
| Overall Extended Height with backrest | | 4,850 mm |
| ENGINE & SPEED | | |
| Engine Type | | Diesel engine |
| Engine Power | | 65 HP (48.5 kW) |
| Maximum Travel Speed | Forward | 30 km/h |
| | Reverse | 11 km/h |
| Gradability | Forward | 46 % |
| | | 34 % |



NOTES:

- The above Towing tractors Names are as per the Manufacturers sizes.
- The Towed weight capacities are at dry even concrete surfaces. The towing capacity will reduce when going up steep gradients.



KINGDOM OF SAUDI ARABIA

CONTACT DETAILS

ACCESS PLATFORMS

055 733 3875, 053 533 3045

FORKLIFTS

053 533 3045, 055 733 3875

GENERATORS AND COMPRESSORS

055 733 3875, 050 079 3332

HEAVY EQUIPMENT

053 533 3045, 055 733 3875

TRANSPORTATION AND LOGISTICS

050 079 3332, 053 533 3045

WELDING EQUIPMENT

055 733 3875, 050 079 3332

QUALITY USED EQUIPMENT

+973 3975 7554, +966 55 888 4575

المملكة العربية السعودية

بيانات الاتصال

الرافعات الشخصية المتنقلة

٠٥٥ ٧٣٣ ٣٨٧٥, ٠٥٣ ٥٣٣ ٣٠٤٥

الرافعات الشوكية

٠٥٣ ٥٣٣ ٣٠٤٥, ٠٥٥ ٧٣٣ ٣٨٧٥

المولدات الكهربائية والضواغط

٠٥٥ ٧٣٣ ٣٨٧٥, ٠٥٠ ٧٩٣٣٣٢

المعدات الثقيلة

٠٥٣ ٥٣٣ ٣٠٤٥, ٠٥٥ ٧٣٣ ٣٨٧٥

النقل والخدمات اللوجستية

٠٥٠ ٧٩٣٣٣٢, ٠٥٣ ٥٣٣ ٣٠٤٥

معدات اللحام

٠٥٥ ٧٣٣ ٣٨٧٥, ٠٥٠ ٧٩٣٣٣٢

معدات مستخدمة ممتازة

+٩٧٣ ٣٩٧٥ ٧٥٥٤, +٩٦٦ ٥٥ ٨٨٨ ٤٥٧٥

24 Hours Hotline: 055 878 1119

Email: awal@mister-machine.com

Website: www.mister-machine.com

Al Khobar Branch

Tel : 013 808 4412, 013 808 4413

013 808 4415, 013 808 4419

P.O. Box: 8146, Al Khobar 34623

address

Warehouse, Madar Industrial Area
King Khalid Road, Al Khobar,
Near Al Thuqba Industrial Area
Kingdom of Saudi Arabia

GPS Map: 26.2443, 50.2003



الخط الساخن ٢٤ ساعة: ٠٥٥ ٨٧٨ ١١١٩

Email: awal@mister-machine.com

Website: www.mister-machine.com

فرع الخبر

هاتف: ٠١٣ ٨٠٨ ٤٤١٢, ٠١٣ ٨٠٨ ٤٤١٣

٠١٣ ٨٠٨ ٤٤١٥, ٠١٣ ٨٠٨ ٤٤١٩

ص.ب: ٨١٤٦, الخبر ٣٤٦٢٣

العنوان

مستودع, منطقة مدار الصناعية
طريق الملك خالد, الخبر
بالقرب من منطقة الثقب الصناعية
المملكة العربية السعودية

خريطة الموقع: ٢٦.٢٤٤٣, ٥٠.٢٠٠٣



**EQUIPMENT DIVISIONS (BAHRAIN)****ACCESS PLATFORMS**

- Articulated Boom Lifts/ Man Lifts
- Telescopic Boom Lifts/ Man Lifts
- Scissor Lifts (Diesel/ Battery)

FORKLIFTS

- Forklifts (Diesel/ Battery/ LPG)
- Reach Trucks
- Telescopic Handlers (Loadall)

FORMWORKS AND SCAFFOLDING

- Modular Formworks
- H-Beams (Wooden Girders)
- Circular Column Formworks
- Scaffolding Sets, and Jacks (Props)
- Proof Tested Scaffold Boards

GENERATORS AND COMPRESSORS

- Generators (1 Phase/ 3 Phase)
- Air Compressors (Diesel/ Electric)
- Portable Fuel Tanks
- Lighting Towers

HEAVY EQUIPMENT

- Compaction/ Rollers
- Cranes, Truck Cranes
- Earth Moving Equipment
- Trucks and Trailers
- Tankers

LIGHT EQUIPMENT

- Cleaning and Cutting Equipment
- Electric Power Tools
- Fixing Tools
- Ladders and Lifting Equipment
- Compactor Plates and Concrete Vibrators
- Painting and Decorating Equipment
- Plumbing Equipment
- Rebar Bending and Cutting Equipment
- Water Pumps and Welding Equipment

PORTABLE CABINS

- Portable Cabins, Guard Rooms
- Portable Toilets

RAW MATERIALS

- Sale of Desert Fill, Stones, Sand, and Aggregates

SKIPS

- Skip Bins/ Dumpsters
- Skip Loader Trucks

TRANSPORTATION AND LOGISTICS

- Transport of Equipment, and General Cargo
- Transport of Raw Materials

WELDING EQUIPMENT

- Welding Generators
- Welding Invertors
- Welding transformers
- Welding Rectifiers
- Plasma Arc Cutters

QUALITY USED EQUIPMENT

- Sale of Used Power Tools, Generators, Compressors, Forklifts, Heavy Equipment, Skips, etc.

أقسام المعدات (البحرين)**الرافعات الشخصية المتنقلة**

- رافعات سلة مفصليّة
- رافعات سلة تلسكوبية
- الرافعات المقصية (ديزل/ بطارية)

الرافعات الشوكية

- الرافعات الشوكية (ديزل، بطارية، غاز)
- رفعات المخازن الشوكية
- رافعات المناولة التلسكوبية

قوالب الخرسانة والسقالات

- قوالب المقاسات المتعددة
- دعائم الأسقف الخشبية
- القوالب الدائرية
- أطقم السقالات والدعائم الثابتة
- ألواح/ دوسات خشبية

مولدات والضغوطات

- مولدات كهربائية ١ فيز، ٣ فيز
- ضاغطات الهواء «كمبريسرات»
- خزانات ديزل متنقلة
- أبراج الانارة

المعدات الثقيلة

- مداحل الطرق
- الرافعات المتنقلة
- معدات الحفر والنقل الثقيلة
- القاطرات والمقطورات
- الصهاريج

المعدات الخفيفة

- معدات التنظيف، معدات التقطيع،
- المعدات الكهربائية
- أدوات التصليح
- السلالم - معدات الرفع
- المعدات الداكة وهزازة الكونكريت
- معدات الصباغة والديكور
- معدات السباكة
- معدات تقويس وتقطيع حديد التسليح
- مضخات المياه - معدات اللحام

الكبائن متنقلة

- كبائن متنقلة، كبائن الحراس
- مراديض متنقلة

المواد الخام

- بيع الدفان البري، الصخور، الرمل، الكونكريت

حاويات المخلفات

- حاويات المخلفات
- شاحنات نقل الحاويات

النقلات والخدمات اللوجستية

- نقل المعدات الثقيلة، وجميع أنواع البضائع
- نقل الدفان البري

معدات اللحام

- مولدات اللحام
- محولات اللحام
- عواكس اللحام
- مقومات اللحام
- قواطع قوس البلازما

بيع المعدات المستعملة الممتازة

- بيع معدات كهربائية، رافعات شخصية، مولدات كهرباء، كمبريسرات، رافعات شوكية، معدات ثقيلة، حاويات الأنقاض، إلخ

